



RIGID POCKET FILTERS PPL AND PPS

- **100% SYNTHETIC, CORROSION-FREE AND HUMIDITY-RESISTANT**
- **SELF SUPPORTING, LEAK-FREE WELDED POCKETS** - stay rigid in turbulent airstreams - eliminate shedding
- **MAXIMUM DUST HOLDING CAPACITY** due to unique design and Filtrair filter medium

DESCRIPTION

Filtrair manufactures its own thermally bonded synthetic media for their PPL and PPS rigid pocket filters. The depth-loading medium is manufactured in a progressive density multi-layering technique to ensure high dust holding capacity with lowest pressure drop. For the user, this results in long filter life and low energy and maintenance costs.

The pocket filter medium is inherently rigid with a welded rib construction to form a pocket with the highest possible functional security in even the most brutal air pressure and high dust-laden environments.

PPL and PPS rigid pocket filters are metal free and thus do not corrode, can be incinerated and withstand 100% humidity environments with ease.

FEATURES AND BENEFITS

- **AERODYNAMIC** wedge-shape, tubular **POCKET SPACERS** - minimum air flow resistance, maximum turbine output
- **POCKETS** integrated in injection moulded, impact-proof PU header - gives filter a burst strength of < 24 "w.g.
- **FLAMMABILITY CLASSIFICATIONS** as per U.S. UL 900, class 2 and as per DIN 53'438, class K1/F1
- Independently tested filter range

APPLICATIONS

Filtrair PPL and PPS rigid filters serve as pre-filter in air intake systems of combustion engines, industrial plants and in all HVAC applications. They are suitable for filtration in any environmental condition - including offshore, marine - and in any climate - including tropical. They efficiently remove airborne particulate matter but also snow, mist and fog. Where subsequent final filters are placed, they protect them from coarser dust, salt and fog, thus significantly prolonging their life and increasing their operational safety.


RIGID POCKET FILTERS PPL AND PPS

TECHNICAL DATA			
Filter type	Unit	PPL	PPS
Rated air flow (1/1 size)	cfm	2000	2000
Initial pressure drop at rated air flow (2000 cfm)	"w.g.	0.1	0.2
Initial pressure drop at rated air flow (2500 cfm)	"w.g.	0.2	0.3
Recommended final pressure drop	"w.g.	1.0	1.0
MERV* ASHRAE 52.2.2012	-	7	7
Average Arrestance	%	94	92
Dust holding capacity (Ashrae dust) 1 "w.g.	g/unit	1300	520

PRODUCT GEOMETRIES							
Product Geometries	Unit	PPL 1/1	PPL 5/6	PPL 1/2	PPS 1/1	PPS 5/6	PPS 1/2
Filter dimensions	"	23.43*23.43	19.43*23.43	11.39*23.43	23.43*23.43	19.43*23.43	11.39*23.43
Filter length	"	24.4	24.4	24.4	12.2	12.2	12.2
Filter medium area	ft ²	45	38	23	23	19	11
Nr. of pockets	-	6	5	3	6	5	3
Filter weight	lb	4.4	4.0	2.6	3.5	3.1	2.4
Package - nr of filters per box	unit	2	2	2	2	2	2
Suitable for standard mounting frame	"	24*24	20*24	12*24	24*24	20*24	12*24
Maximum continuous working temperature	°F	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160
Admissible relative humidity	%	100	100	100	100	100	100
Maximum final operating pressure drop	"w.g.	2.4	2.4	2.4	2.4	2.4	2.4
Burst pressure drop	"w.g.	>24	>24	>24	>24	>24	>24

Options available on request Gasket on downstream, on upstream side or on both sides

PRESSURE DROP vs AIR VOLUME

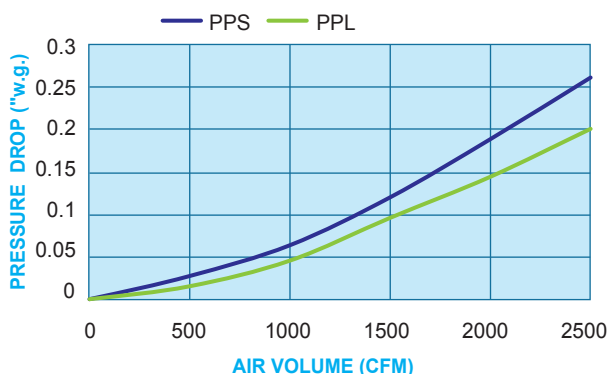

All data are average indicative values with usual manufacturing and testing tolerances. We reserve the right to modify performance data without prior notice. Specific performance data will require our written confirmation. Filtrair® is the registered trade mark of Filtrair bv.

